



## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

08/794400

Hwe

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231Date: August 27, 1996  
Docket No. PHN 14,491A  
Prior Art Unit 2415  
Prior Ex. J. BRIER

#13/D

Sir:

This is a request for filing a [X] continuation [ ] divisional application under [ ] 37 C.F.R. 1.60 [X] 37 C.F.R. 1.62 of pending prior application Serial No. 08/255,277, filed on JUNE 8, 1994 of RENATE M. SOMBROEK and JAN D. GERLINGS for SPEED ADAPTIVE POSITIONING OF CURSOR IN CD-I.

10-23-96  
MJC

1. [ ] As last amended, the title has been changed to
2. [ ] As last amended, the name of applicant has been changed to
3. [ ] Enclosed is a copy of the prior application, including the oath or declaration. Applicant's undersigned attorney hereby states that these application papers comprise a true copy of the prior application as filed.
4. [X] The filing fee is calculated below:

## CLAIMS AS FILED IN THIS APPLICATION

For	Number Filed	Number Extra	Rate	Basic fee \$750
Total Claims	-20	=	X \$22	=
Independent Claims	- 3		X \$78	=
Multiple Dependent Claims, if any (\$250)				=
Total Filing Fee-----				\$750.00

5. [X] Charge any fees which may be required, except for the Issue Fee, or credit any overpayment to Deposit Account No. 14-1270.
6. [ ] Cancel in this application original claims of the prior application before calculating the filing fee.
7. [X] Amend the specification by inserting before the first line the sentence:- This is a [X] continuation [ ] division of application Serial No. 08/255,277, filed JUNE 8, 1994.
8. [X] Priority of application Serial No. 93201701.5, filed on JUNE 14, 1993 in EUROPE, is claimed under 35 U.S.C. 119.
9. [X] The certified copy of the priority application has been filed in prior application Serial No. 08/255,277, filed JUNE 8, 1994.
10. [ ] An appointment of associates is enclosed.
11. [X] Address all future communications to Corporate Patent Counsel, U.S. Philips Corporation, Patent Department, 580 White Plains Road, Tarrytown, New York 10591.
12. [X] A preliminary amendment to this application is enclosed.
13. [ ] Enter in this application the amendment under 37 C.F.R. 1.116 which was unentered in the prior application.

## CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EM 324 680 368  
Date of Deposit AUGUST 27, 1996

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

VERA KUBLANOV

Typed Name

W:\VK\MB27\VK80.BDO

Signature

Jack R. Haken, Reg. 26,902  
Attorney of Record  
in Prior Application  
(914) 333-9650  
U.S. Philips Corporation  
580 White Plains Road  
Tarrytown, New York 10591



#14/  
E  
10-23-96  
MJC

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

RENATE M. SOMBROEK ET AL

PHN 14,491A

Serial No.

Former Group Art Unit: 2609

Filed: CONCURRENTLY

Former Examiner: J. BRIER

SEED ADAPTIVE POSITIONING OF CURSOR IN CD-I

Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Please amend the application as follows:

IN THE CLAIMS

Please amend the claims submitted on May 30, 1996, and entered upon the Notice of Appeal, as follows:

1. A data processing system being comprised of:
  - a display;
  - a cursor control means connected to the display for displacement of a cursor represented on the display; and
  - a user-interface means, having a manually operable data input device [being] coupled to the cursor control means for user manipulation of the cursor via the cursor control means, the manually operable data input device [the user-interface means] being operative to control the cursor control means by transmitting low speed data, effecting a relatively low cursor speed, to the cursor control means during a predetermined time interval, and by transmitting high speed data, effecting a relatively high cursor speed, to the cursor control means after the predetermined time interval has elapsed;
  - wherein the cursor control means is operative to displace the cursor at the relatively low speed relative to the display during the predetermined time interval upon activation of the manually operable data input device [user interface means] and to displace the cursor at the relatively high speed after the predetermined time interval has elapsed.

REMARKS

The present continuation is filed for the purpose of introducing an amended claim 1 that patentably distinguishes over the Kato reference.


The above amendment is supported by the application as filed, e.g., page 4, lines 12-13; or page 1, line 22. Amended claim 1 now defines the manually operable data input device to transmit low-speed data or high-speed data as a function of time.

Note that the Kato reference implements the timer control in software (reference numbers 5 and 7). In the invention, it is the transfer function of the manually operable data input device that is made time-dependent. As a consequence, software that conventionally provides a single speed or a single speed range now is operated as if it had two or more different speed ranges available. Also, if the Kato system were to be combined with the present invention, the number of time-dependent speed ranges would be increased further.

Please charge any fees other than the issue fee to deposit account 14-1270.

Please credit any overpayments to the same account.

Respectfully submitted,

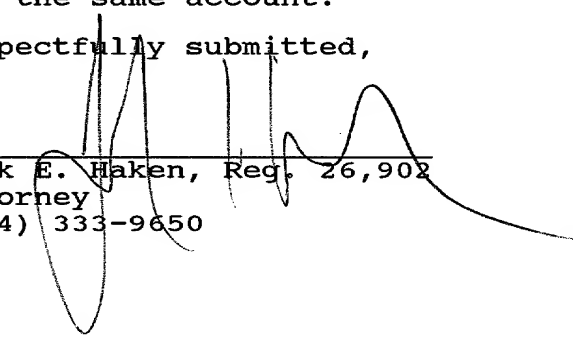By   
Jack E. Haken, Reg. 26,902  
Attorney  
(914) 333-9650



40

08

255277

H

IN 14.491

1

25.04.1994

Speed adaptive positioning of cursor in CD-I.

## Speed Adaptive Positioning Of Cursor In CD-I.

D' &gt;

### FIELD OF THE INVENTION

The invention relates to a data processing system comprising a display, a cursor control means connected to the display for displacement of a cursor represented on the display; and a user-interface means being coupled to the cursor control means for user-manipulation of the cursor via the cursor control means. In particular, the invention relates to a CD-I system.

### BACKGROUND ART

Systems as mentioned in the preamble, among which CD-I systems in particular, are widely known. With the advent of CD-I there has been created a considerably user-friendly medium, which enables interactive handling of information in an ergonomic manner. CD-I systems are particularly, but not exclusively, designed for consumer applications in domestic environments. CD-I applications, e.g., software on compact disc information carriers, are available in a large variety of titles, ranging from video games and reference books to teaching and training applications. User-interface aspects are considered among the key issues that govern the wide acceptance of CD-I. For further information on technical issues, see "Compact Disc-Interactive; A Designer's Overview", Kluwer, Nov. 1988, ISBN 9020121219.

In many program applications, user-interaction with the data processing system is achieved through cursor control. A cursor is a figure, which is displayed on the display screen and whose position can be changed relative to the screen by the user manipulating the user-interface means, e.g., a <sup>maneuvering</sup> ~~manoeuvring~~ device. The user moves the cursor across the screen as in a video game, or positions the cursor in a particular area shown on the screen, e.g., to select a particular program option as in a menu. The user-interface means may be provided with a <sup>maneuvering</sup> ~~manoeuvring~~ functionality such as, for example, a plurality of buttons, each for control of the cursor movement in a particular direction, a joy-stick, or a single thumb-controlled button for selective multiple-direction control of the cursor.

## OBJECT OF THE INVENTION

The inventors have found that in conventional systems the cursor speed within a single application is some sort of a compromise, i.e., either it is too low for rapidly transferring the cursor over large distances, leading to a tedious behaviour of the system, or too high for accurate positioning, resulting in a rather difficult manipulation of the cursor homing-in on a chosen target.

It is an object of the invention to provide a data processing system of the kind cited in the preamble, in particular a CD-I system, whose cursor positioning control is more user-friendly and whose cursor control means are simply implemented.

## SUMMARY OF THE INVENTION

To this end, the invention provides a data processing system being comprised of a display; a cursor control means connected to the display for displacement of a cursor represented on the display; and a user-interface means being coupled to the cursor control means for user-manipulation of the cursor via the cursor control means. In accordance with the invention, the cursor control means is operative to displace the cursor at a relatively low speed relative to the display during a predetermined time interval upon activation of the user-interface means and to displace the cursor at a relatively high speed after the predetermined time interval has elapsed.

The invention is based on the insight that quick and accurate positioning of the cursor is attained in a simple and ergonomic manner by a relatively high-speed approach of the destination area for the cursor, releasing the user-interface and thereupon activating the user-interface again to start the predetermined time interval during which the cursor homes in on the destination area with a relatively low speed.

The user-interface means may be operative to control the cursor control means by transmitting data effecting the relatively low speed to the cursor control means during the predetermined time interval, and by transmitting data effecting the relatively high speed to the cursor control means after the predetermined time interval has elapsed. Alternatively, the cursor control means may be provided with timer means to keep record of the time elapsed for deciding when to change the speed.

Generally, data transmission from the user-interface to the cursor control means involves a temporal basis in terms of repetitive events, called cycles hereinafter. For example, the data processing system may comprise a system clock providing a time

basis in terms of clock cycles of fixed length. Alternatively, the aforesaid data transmission may be governed by a protocol whose temporal basis is the repetition of operation cycles, such as cursor position updates. Preferably, the cursor control means is operative to measure the predetermined time interval in terms of a number of the

5 events or cycles. The cursor control means is preferably provided with resettable counting means to count the number of events or cycles elapsed since the user-interface was last activated in order to define the moment of transition from the low-speed domain to the high-speed domain. The counter is reset before another activation of the user-interface occurs.

10 Typically, each respective one of the repetitive events in a CD-I system involves a transfer of information indicative of an update of a cursor position. In a CD-I system, the data communication between the user-interface and the CD-I player is pre-specified in the RS232-C protocol. The interface typically uses a transmission rate of 1200 baud and 3 bytes per update of the cursor position. Each byte sent to the CD-I

15 player typically has 7 data bits, one start bit and 2 stop bits. Accordingly, the maximum number of pixels that the cursor can traverse per second is 40 times the number of pixels specified per single transmission, and each transmission requires 25 msec. This protocol furnishes a time base governing the interaction rate between the CD-I player and the cursor control means. A predetermined number of transmissions provides a

20 simple standard against which the cursor activation time is measured to determine the predetermined time interval in terms of the number of transmissions.

Preferably, the user-interface means is operative to render at least the relatively low speed or the relatively high speed variable in response to the user manipulating the user-interface. That is, the user has to his disposal a high-speed range

25 and/or a low-speed range.

#### BRIEF DESCRIPTION OF THE DRAWING<sup>S</sup>

A The invention is explained below by way of example and with reference to the accompanying drawing, wherein:

- 30 Fig. 1 gives a diagram of the system functionalities in the invention;  
Fig. 2 gives a diagram of cursor speed versus time;  
Fig. 3 gives a functional diagram of the user-interface means; and  
Fig. 4 gives an embodiment of the user-interface.

Throughout the figures, same reference numerals indicate identical or corresponding components.

A  
DESCRIPTION OF PREFERRED EMBODIMENTS  
DETAILED EMBODIMENTS OF THE INVENTION.

5 System

Fig. 1 gives a diagram of a data processing system 100 in the invention. System 100 is functionally comprised of a display 102, a data processing apparatus 104 being operative to generate video or graphics data and being coupled to display 102, and a user-interface means 106 coupled to apparatus 104. User-interface means 106  
10 controls the movement of a cursor 108 on display 102 through a cursor control means 110. Cursor control means 110 here is included in apparatus 104. For example, display 102 is a monitor, apparatus 104 is a CD-I player, and user-interface means 106 is a manually operable data input device, functionally operating as a <sup>maneuvering</sup> ~~manoeuvring~~ device, e.g., a joy stick. The term "cursor" is meant to comprise any figure shown on the  
15 display and to be selectively positioned in a particular area of the display under user-control. Cursor control means 110 usually is dedicated software.

Manual operation of user-interface means 106 generates signals for transmission to cursor control means 110 that thereupon causes cursor 108 to move accordingly. Cursor control means 110 may repetitively interrogate user-interface means  
20 106 to determine the status of the latter for thereupon carrying out the corresponding displacement of cursor 108. Alternatively, user-interface means 106 may directly supervise cursor control means 110 to affect the position of cursor 108.

As explained above, a well adjusted cursor speed is one of the features that renders system 100 user-friendly. Too low a speed of cursor 108 is likely to be  
25 found boring, whereas too high a speed will cause overshoots while trying to position cursor 110 at desired location. The invention therefore provides cursor control means 110 with automatic dynamic speed adaptivity. This is explained with reference to Fig. 2.

30 Speed diagram

Fig. 2 shows a diagram 200 to explain quantitatively the cursor speed control. Time  $t$  is drawn horizontally in, e.g., operation cycles or clock cycles, speed  $v$  is drawn in, e.g., pixels/sec. According to the invention, cursor 108 moves at a

962280-00440280

relatively low speed lower than or equal to  $v_1$  during a first time period of duration  $t_1$  that starts when user-interface 106 is activated. When the first time period has elapsed, cursor 108 is enabled to move at a relatively high speed lower than or equal to  $v_2$ , being significantly higher than  $v_1$ . If desired, the speed of cursor 108 is increased again  
5 after a time  $t_2$  during which cursor 108 was kept moving at the relatively high speed.

In CD-I systems, a screen of display 102 typically has 720x480 pixels (NTSC mode) or 768x560 pixels (PAL mode). A maximum cursor speed at which cursor 108 is still controllable typically is 400 pixels per second. Slow speed  $v_1$  may be in the order of 10 pixels per second. Speed levels  $v_1$ ,  $v_2$  and  $v_3$ .

10 As mentioned above, the RS232-C protocol typically uses a transmission rate of 1200 baud and 3 bytes per update of the cursor position. Each byte sent to the CD-I player typically has 7 data bits, one start bit and 2 stop bits. Accordingly, the maximum number of pixels that the cursor can traverse per second is 40 times the number of pixels specified per single transmission, and each transmission requires 25  
15 msec. Experiments have shown that a value of time interval  $t_1$  in the order of  $0.2$ <sup>0.2</sup>~~0.2~~ seconds is acceptable when the cursor is displaced by one pixel per transmission, i.e., six to eight successive transmissions suffice in practice to accurately position the cursor. Note that the optimum values for speed  $v_1$  and time  $t_1$  may depend on the individual application run on the CD-I system.

20 Accurate positioning of cursor 108 now is accomplished in a fairly simple way without being hindered by a too high cursor speed, whereas large distances can be traversed fairly rapidly, all within the same application. In case cursor 108 is to be displaced over a short distance around display 102, low speed  $v_1$  and time  $t_1$  will do perfectly well to position cursor 108 precisely as desired. In case cursor 108 has to  
25 travel a long distance, it will do so initially at a low speed  $v_1$  for a time period of duration  $t_1$ . However, as soon as a time period of  $t_1$  has elapsed, the cursor speed is increased to  $v_2$  to rapidly traverse a long distance. When approaching the desired position, cursor 108 is to be disabled for just a moment, e.g., by letting loose user-interface 106. Re-activating user-interface 106 then causes cursor 108 to start moving at  
30 a low speed  $v_1$  again, which is adequate for accurate positioning. When necessary, disabling and subsequent reactivating can be repeated.

The cursor speed may be fixed at values  $v_1$  and  $v_2$ . Alternatively,  $v_1$  and  $v_2$  may be the upper bounds of low-speed and high-speed ranges, the cursor speed

b  
03704400-00440280



being continuously variable through user-interface 106.

The optimum combinations of speeds  $v_1$  and  $v_2$  (and  $v_3$  and etc.) together with time periods  $t_1$  (and  $t_2$  and etc.) may depend on the application run on system 100. Some applications such as games require a rapid and highly accurate positioning of cursor 108, whereas other applications, such as carrying out a selection through menus, do not need a very precise positioning. Accordingly, cursor speed preferably is made programmable, with regard to magnitude or duration or both. This could be attained by switches or dials to be set by the user. As another option, a special speed selection program could be run on system 100 to let the user select preferred speeds  $v_1$  or  $v_2$ , e.g., through a menu. Alternatively, cursor speeds could be made to vary automatically under system control depending on the application run on system 100.

#### User-interface functionalities

Fig. 3 gives a diagram to explain the successive operations for cursor control to be carried out in the signal path from user-interface 106 to cursor control means 110. Fig. 3 shows user-interface 106 composed of a pick-up means 302; a converter 304 coupled to an output of pick-up means 302; a processor 306 coupled to an output of converter 304; and a converter 308 coupled to an output of processor 306. Pick-up means 302 is operative to sense the manipulation by the user and to provide corresponding output signals. Converter 304 is operative to convert the output signals from pick-up means 302 into appropriately formatted input signals to processor 306. Processor 306 is operative to interpret the output signals from pick-up means 302 as indicative of the desired direction of displacement of cursor 108. Converter 308 is optional and is meant to convert the output signals of processor 306 into an appropriate format accepted by apparatus 104. Converter 308 can also be functionally integrated with processor 306.

#### User-interface embodiment

Fig. 4 shows an example of an embodiment of user-interface means 106. Pick-up means 302 is comprised of force sensing resistors 402, 404, 406 and 408 for control of the movement of cursor 108 to the left, to the right, up and down, respectively. A force sensing resistor is, for example, a polymer thick film resistor such as FSR of Interlink. Such a resistor has a resistance that decreases with increasing

pressure applied to the film. Typically, the resistance value is inversely proportional to the applied force in the range between 15 gram to 10 kg and swings about 100 k $\Omega$ .

The actual resistance values of resistors 402-408 are to be converted into digital data. This can be achieved in a variety of manners, e.g., by way of an A/D  
5 conversion, by way of an oscillator or a VCO of which the resistor is a functional part and digitally measuring the frequency or the VCO's control signal, or via an RC-arrangement to measure the varying charging or discharging time of the capacitor C through a counting circuit. The RC option turns out to be a cheap and simple solution and is implemented as follows.

10 Resistors 402, 404, 406 and 408 all are connected to a capacitor 410 via a node 412. Resistors 402, 404, 406 and 408 are individually coupled to control inputs 414, 416, 418 and 420, respectively, via diodes 422, 424, 426 and 428, respectively. Node 412 is further coupled to a charge control input 430 via a diode 432. Setting  
15 control inputs 414, 416, 418, 420 and 430 at 5 volt, e.g. through processor 306, causes capacitor 410 to be charged. Setting control inputs 416, 418 and 420 at 5 volts and control inputs 414 and 430 at 0 volt, e.g., through processor 306, causes capacitor 410 to be discharged via resistor 402. The voltage level at node 412 decreases exponentially with characteristic RC time, R being the instant resistance of resistor 402, C being the capacitance of capacitor 410. Node 412 is connected to a Schmitt trigger 434 that  
20 provides an output signal of well defined voltage level, and also functions as a buffer with small input impedance so as not to affect the voltage at node 412 too severely. Schmitt trigger 434 supplies its output signal to a timer 436 in processor 306. Timer 436 stops counting when Schmitt trigger 434 switches over due to the voltage at node 412 being dropped below a particular level. The contents of timer 436 then is  
25 representative of the resistance value of resistor 402 and, therefore, of the force experienced by resistor 402.

This timer contents now can be translated by a calculation means 438 of processor 306 into a quantity associated with a magnitude of the speed of cursor 108 in the direction associated with resistor 402, which is to the left. Consecutively  
30 interrogating resistors 402-408 generates consecutive timer contents that are combined in calculation means 438 to produce a particular speed and a particular direction. For example, the difference between the up and down related timer contents corresponds to a vertical component of the cursor speed, whereas the difference between the left and

952280-00440280

right related timer contents corresponds to the horizontal component of the cursor speed. These components then can be combined to generate a proper velocity vector on a pixel grid of display 102 in a conventional manner. Calculation means 438 could be implemented, for example, by a simple look-up table.

b  
b  
b  
b  
5 Typically, the maximum voltage at node 412 is <sup>4.3</sup>~~4.3~~ volt as the voltage drop across diodes 422-428 is <sup>0.7</sup>~~0.7~~ volt. Schmitt trigger 434 has a typical switch-over point of <sup>0.8</sup>~~0.8~~ volt. Typically, the maximum time allowed to discharge is 300  $\mu$ sec, and the minimum time is 1  $\mu$ sec. The capacitance of capacitor 410 is typically <sup>2.2</sup>~~2.2~~  $\mu$ f.

Cursor speed range control as proposed in the invention is accomplished  
10 as follows. In a first step, the resistance values of resistors 402-408 are measured as specified above while user-interface 106 is manipulated. In a next, second step, these measured resistance values are reduced in processor 306 to cursor displacement quantities in the appropriate format accepted by apparatus 104. In a next, third step, the displacement quantities are transmitted to apparatus 104. These steps are normally  
15 cyclically repeated while user-interface 106 is kept actuated. Processor 306 is provided with a counter 440 to register up to a pre-specified number of aforesaid first steps that were carried out since user-interface 106 was last actuated. Before counter 440 reaches the pre-specified number, calculation means 438 is made to furnish low-speed data. When counter 440 has counted the pre-specified number, calculation means 438 is  
20 controlled to provide high-speed data.

User-interface means 106 is provided with a Universal Asynchronous Receiver and Transmitter 442 (UART) for serial RS232 communication of the data pertaining to cursor speed and direction, mentioned above as the accepted protocol in CD-I. Alternatively, processor 306 may have an UART 442 aboard such as the 8051-  
25 based 8-bit microcontrollers of Philips.

08704400 082796  
962280 00440280

~~CLAIMS:~~ WE CLAIM

Sub. Bt  
E<sup>1</sup>

1. ~~A data processing system being comprised of:~~  
- a display;  
- a cursor control means connected to the display for displacement of a cursor represented on the display;  
5 - a user-interface means being coupled to the cursor control means for user-manipulation of the cursor via the cursor control means;  
~~characterized in that~~  
~~wherein~~  
10 ~~the cursor control means is operative to displace the cursor at a relatively low speed relative to the display during a predetermined time interval upon activation of the user-interface means and to displace the cursor at a relatively high speed after the predetermined time interval has elapsed.~~

2. ~~The system of claim 1, wherein the user interface means is operative to control the cursor control means by transmitting data effecting the relatively low speed to the cursor control means during the predetermined time interval, and by transmitting~~  
15 ~~data effecting the relatively high speed to the cursor control means after the predetermined time interval has elapsed.~~

3. ~~The system of claim 1, wherein data transmission from the user-interface to the cursor control means involves a temporal basis in terms of repetitive events, and wherein the cursor control means or the user-interface is operative to measure the~~  
20 ~~predetermined time interval in terms of a number of the events.~~

4. ~~The system of claim 3, wherein a respective one of the repetitive events involves is a respective update of a cursor position, and wherein the relatively low speed is effected by a relatively short displacement of the cursor per update, and wherein the relatively high speed is effected by a relatively large displacement of the~~  
25 ~~cursor per update.~~

5. ~~The system of claim 1, wherein the user-interface means is operative to render at least the relatively low speed or the relatively high speed variable in response to the user manipulating the user-interface.~~

08704400-082795  
962280-00440280

Sub  
G2

6. The system of claim 3, wherein the cursor control means or the user-interface means is provided with a resettable counting means to count the number of events elapsed since the user-interface was last activated.

7. The system of claim 1 ~~or 3~~, comprising a CD-I system.

8. ~~A user interface means suitable for use in the system of claim 2, 5 or 6.~~

A

ASD.  
B2

5

087440-082796  
Add  
G<sub>1</sub>  
add  
H<sub>1</sub>  
add  
I<sub>1</sub>

*a*  
ABSTRACT of the Disclosure

- A data processing system is comprised of a display; a cursor control means connected to the display for displacement of a cursor represented on the display; and a user-interface means coupled to the cursor control means for user-manipulation of the cursor via the cursor control means. The cursor control means is operative to
- 5 displace the cursor at a relatively low speed relative to the display during a predetermined time interval upon activation of the user-interface means and to displace the cursor at a relatively high speed after the predetermined time interval has elapsed.

962230"004400Z80

1/2

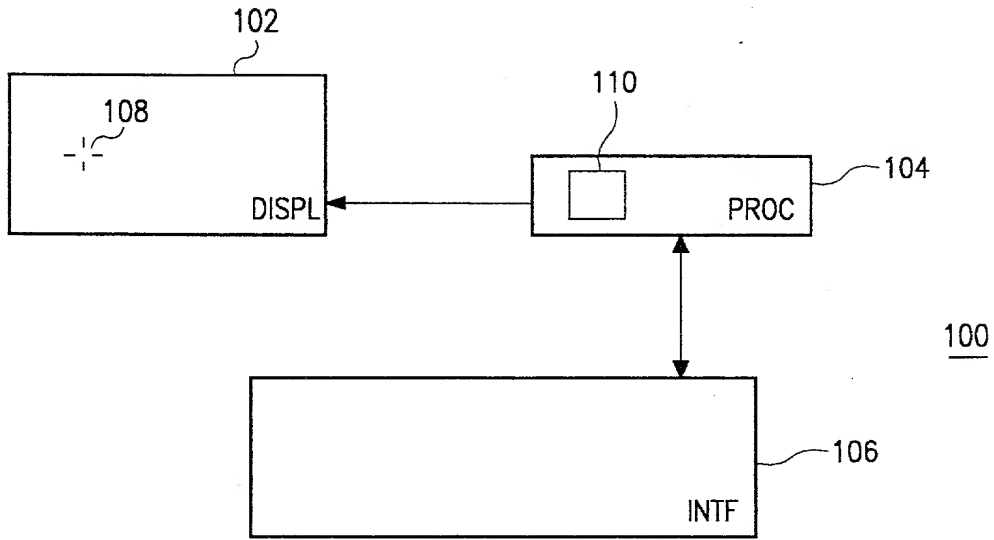


FIG. 1

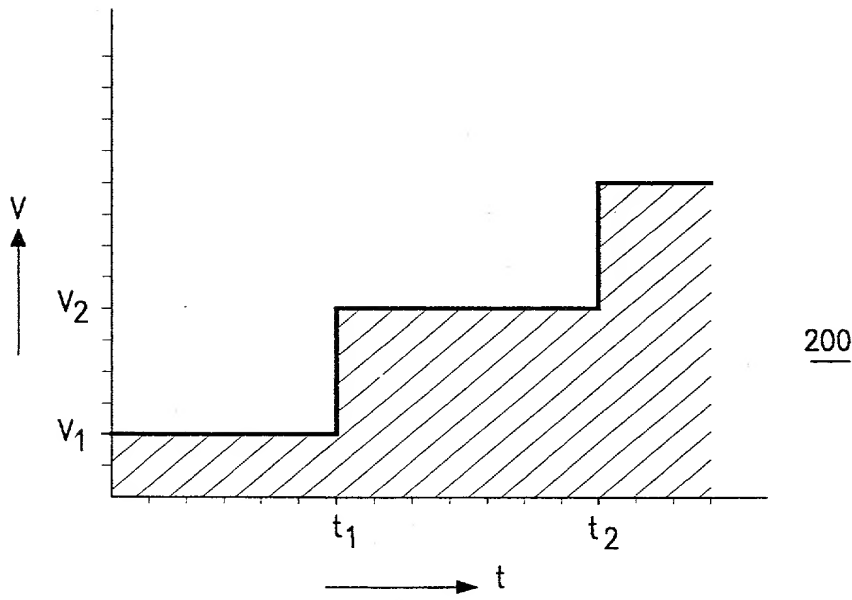


FIG. 2

08704400-082796

2/2

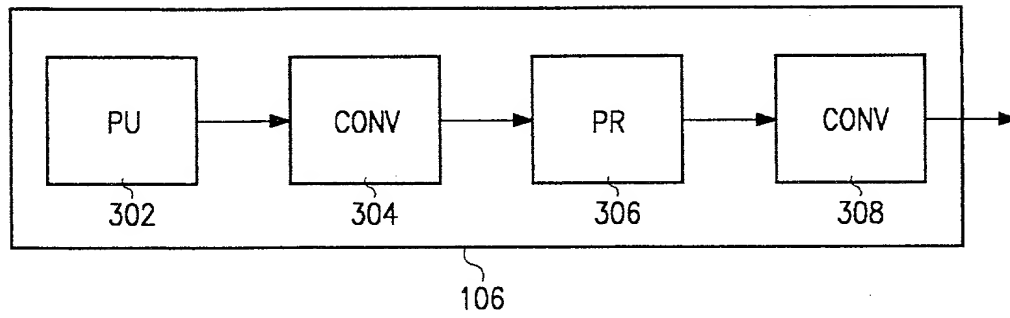


FIG. 3

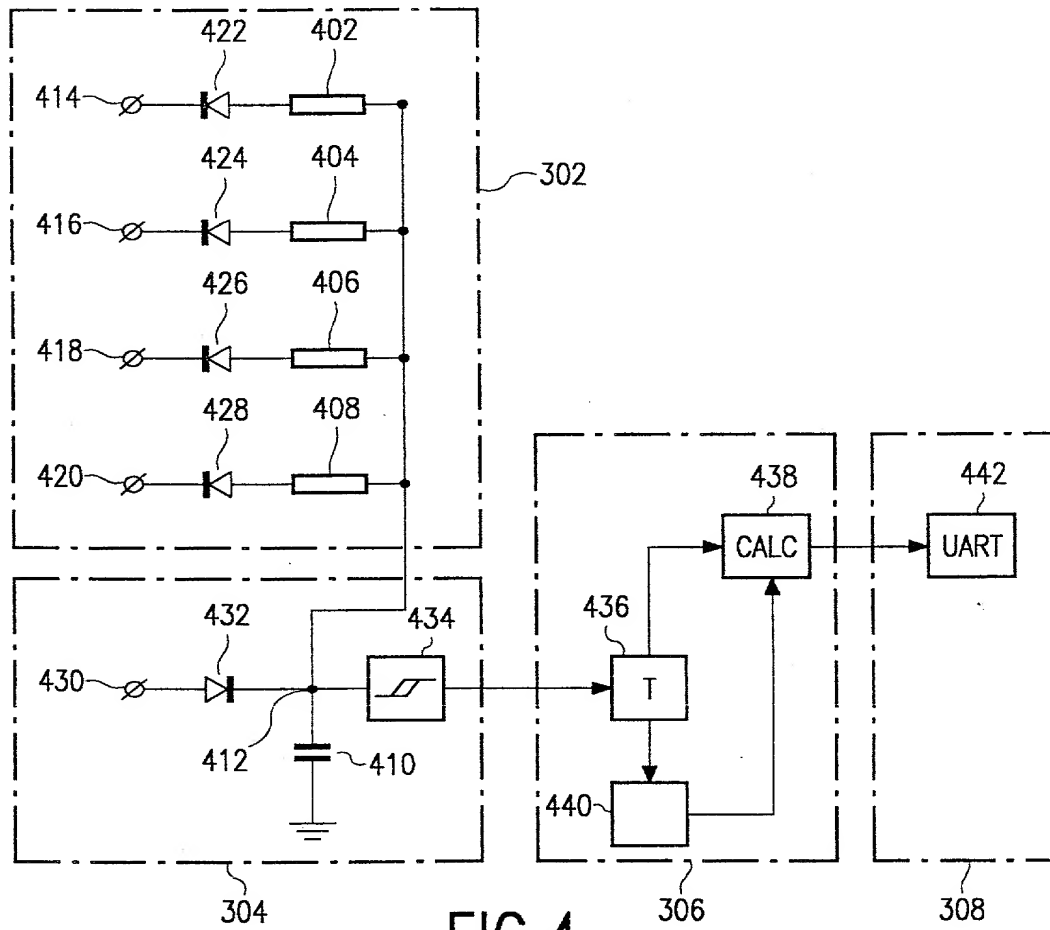


FIG. 4

08704400 00440280



## DECLARATION AND POWER OF ATTORNEY

Sole/Joint

Attorney's Docket No.

PHN 14.491

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"Speed adaptive positioning of cursor in CD-I"

the specification of which (check one)

☐ is attached hereto.☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

## PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY Claimed Under 35 U.S.C. 119
Europe	93201701.5	14-06-1993	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

## PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)Algy Tamoshunas, Reg. No. 27,677  
Jack E. Haken, Reg. No. 26,902SEND CORRESPONDENCE TO:  
Corporate Patent Counsel  
U.S. Philips Corporation  
580 White Plains Road  
Tarrytown, New York 10591DIRECT TELEPHONE CALLS TO  
(name and telephone No.)

(914) 332-0222

Dated: May 3, 1994		Inventor's Signature:	
FULL NAME OF INVENTOR	Last Name SOMBROEK	First Name Renate	Middle Name M.
RESIDENCE & CITIZENSHIP	City Delft	State or Foreign Country The Netherlands NLX	Country of Citizenship The Netherlands
POST OFFICE ADDRESS	Street & No. Korvezeestraat 393	City 2628 DS Delft	State or Country NL
Dated: May 18, 1994		Inventor's Signature:	
FULL NAME OF INVENTOR	Last Name GERLINGS	First Name Jan	Middle Name D.
RESIDENCE & CITIZENSHIP	City Eindhoven	State or Foreign Country The Netherlands NLX	Country of Citizenship The Netherlands
POST OFFICE ADDRESS	Street & No. Telemannlaan 102	City 5653 AP Eindhoven	State or Country NL